

This Information Is Provided By

CBTricks.com

How to install the Powerband RFX75
on a RCI manufactured radio with a EPT6900 series PCB.

Liability of damages to any equipment is the sole responsibility of the user!
Downloading, viewing, or using any information provided on these pages
automatically accepts the user to the terms of this agreement!
Modifications are provided for information purposes only!
Supporters of CBTricks.com paid for the hosting so you would have this file.

CBTricks.com is a non-commercial personal website was created to help promote the exchange of service, modification, technically oriented information, and historical information aimed at the Citizens Band, GMRS (CB "A" Band), MURS, Amateur Radios and RF Amps.

CBTricks.com is not sponsored by or connected to any Retailer, Radio, Antenna Manufacturer or Amp Manufacturer, or affiliated with any site links shown in the links database. The use of product or company names on my web site is not endorsement of that product or company.

The site is supported with donations from users, friends and selling of the Site Supporters DVD's to cover some of the costs of having this website on the Internet instead of relying on banner ads, pop-up ads, commercial links, etc. Thus I do not accept advertising banners or pop-up/pop-under advertising or other marketing/sales links or gimmicks on my website.

All the money from donations is used for CBTricks.com I didn't do all the work to make money (I have a day job). This work was not done for someone else to make money also, for example the eBay CB sellers.

All Trademarks, Logos, and Brand Names are the property of their respective owners.
This information is not provided by, or affiliated in any way with any radio or antenna Manufacturers.
Thank you for any support you can give.

For information on how to Support CBTricks.com
<http://www.cbtricks.com/support/>


The user is solely responsible for making sure that any modifications made to the radio unit must meet all Federal and State Regulations or the Country of use! Liability of damages to any equipment is the sole responsibility of the user! Downloading, viewing, or using any information provided on these pages automatically accepts the user to the terms of this agreement! Modifications are provided for information purposes only! Disclaimer: CBTricks.com does not warrant the accuracy of the information contained herein nor is it responsible for any errors or omissions and assumes no liability for the content on this site. While CBTricks.com uses reasonable efforts to include accurate and up to date information, CBTricks.com makes no warranties or representations as to its accuracy or timeliness and assumes no liability or responsibility for any errors or omissions in the content of this site.

RFX75 – EPT6900 Series Radio Installation, Revision 2


Revision 2 – Improved RX Sensitivity and SSB ALC Stays Functional

1. Remove C192, C194, C195, C198, C209, JP101, L28, L29, L33, L34, Q47, Q48, and D89 from the radio.
2. Add a jumper wire across the 2 holes where L28 was removed.
3. Cut the RX OUT coax cable off the RFX75 board. Take care to cut it close enough to the PCB so that it does not short out on anything.
4. Drill and mount the RFX75 on the back of the radio using the supplied hardware.
5. Solder the Red and Black wires to the back of the DC power jack (observe polarity!).
6. Route the remaining coax cables and wires from the RFX75 through the slot in the PCB where Q47 and Q48 were removed. So that these wires can be connected to the solder side of the PCB.
7. Solder the RF IN coax center conductor to the trace at the junction of JP101 and C210. Solder the coax shield to a nearby DC ground trace.
8. Solder the RF OUT coax center conductor to the trace at the junction of L28 and C192. Solder the coax shield to chassis ground (trace at the junction of C192 and C193).
9. Solder the yellow wire to the positive side trace of C198 (trace at junction of C198 and D89).
10. Solder the blue wire to the trace at the junction of R243 and JP105.
11. Solder the orange wire to the center pin of Q54.
12. **SSB Models ONLY:** On SSB models only, unsolder the leg of C190 that is closest to the rear panel of the radio. Add a 3.3K ohm, ¼ watt resistor in series with the unsolder leg.
13. Re-tune the transmit and receive. **DO NOT SET THE CARRIER HIGHER THAN 15 WATTS!**

The user is solely responsible for making sure that any modifications made to the radio unit must meet all Federal and State Regulations or the Country of use! Liability of damages to any equipment is the sole responsibility of the user! Downloading, viewing, or using any information provided on these pages automatically accepts the user to the terms of this agreement! Modifications are provided for information purposes only! Disclaimer: CBTricks.com does not warrant the accuracy of the information contained herein nor is it responsible for any errors or omissions and assumes no liability for the content on this site. While CBTricks.com uses reasonable efforts to include accurate and up to date information, CBTricks.com makes no warranties or representations as to its accuracy or timeliness and assumes no liability or responsibility for any errors or omissions in the content of this site.

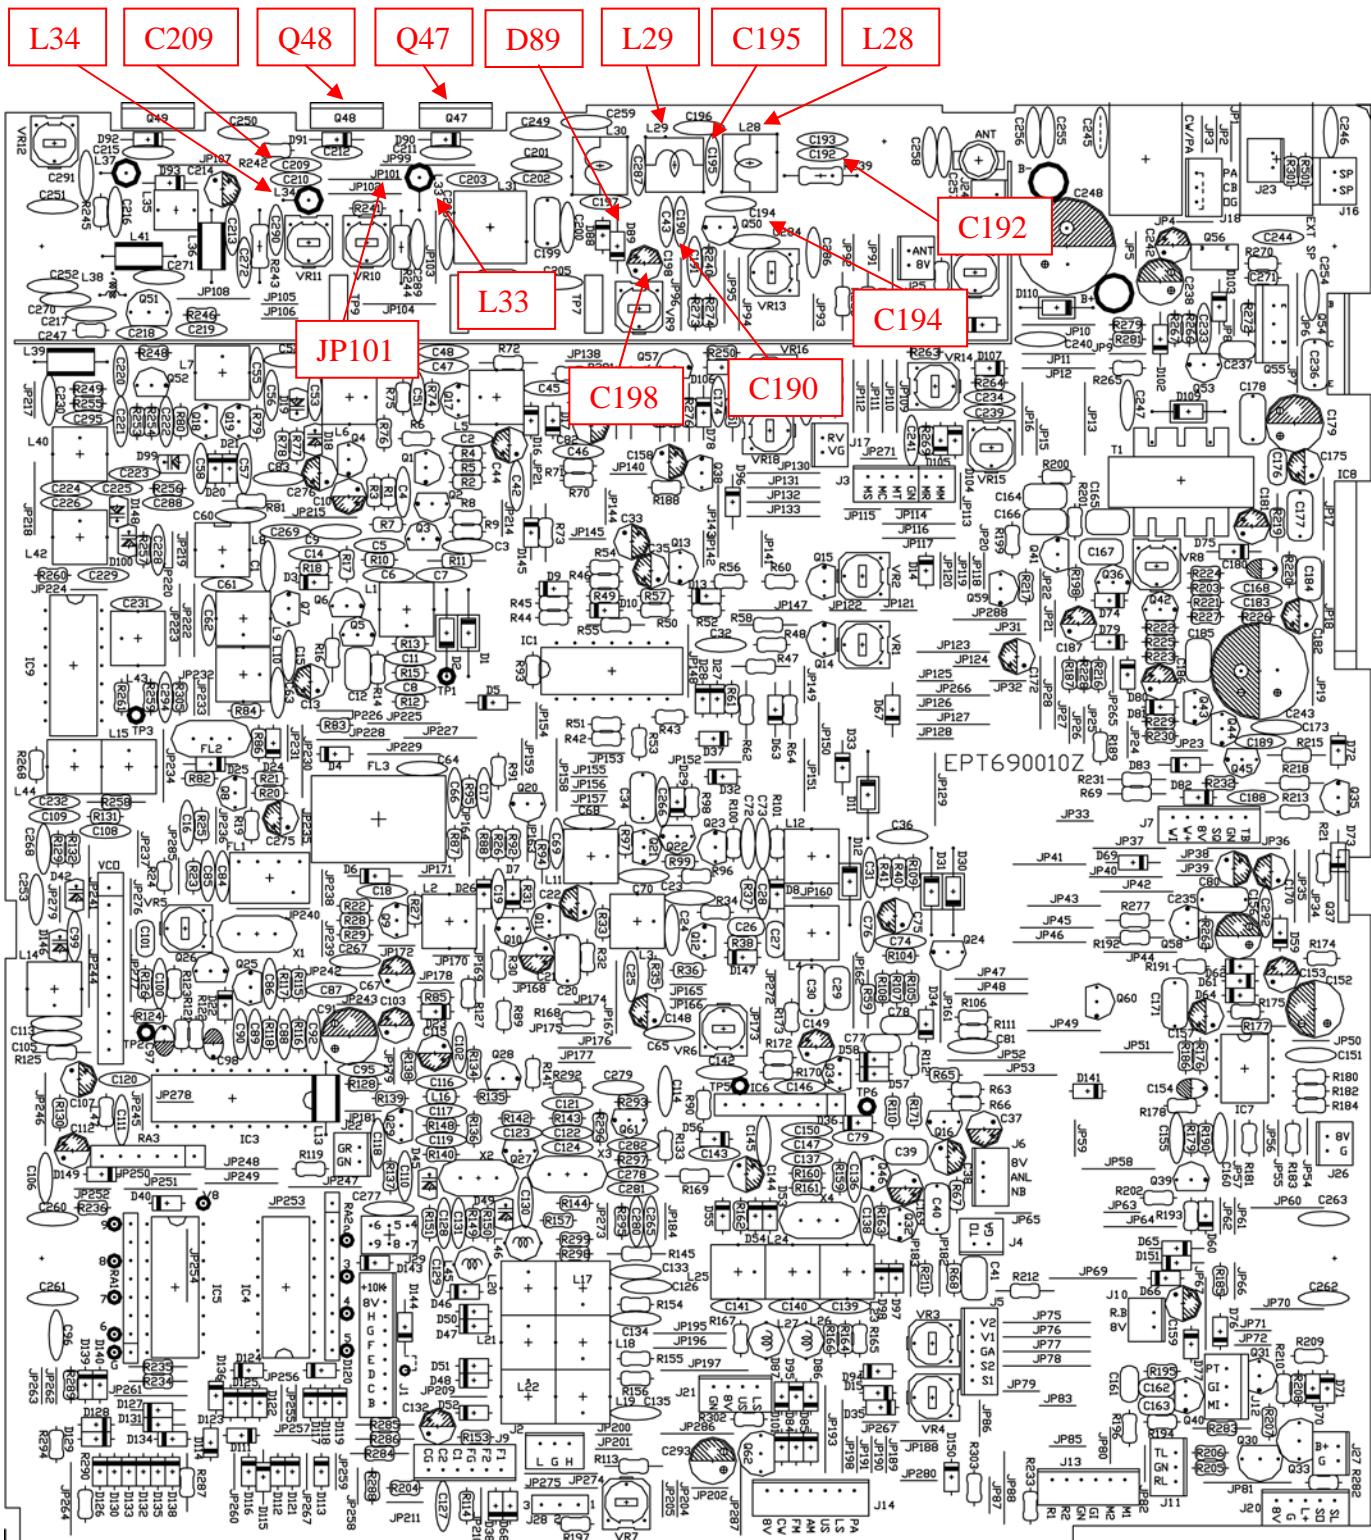

The user is solely responsible for making sure that any modifications made to the radio unit must meet all Federal and State Regulations or the Country of use! Liability of damages to any equipment is the sole responsibility of the user! Downloading, viewing, or using any information provided on these pages automatically accepts the user to the terms of this agreement! Modifications are provided for information purposes only! Disclaimer: CBTricks.com does not warrant the accuracy of the information contained herein nor is it responsible for any errors or omissions and assumes no liability for the content on this site. While CBTricks.com uses reasonable efforts to include accurate and up to date information, CBTricks.com makes no warranties or representations as to its accuracy or timeliness and assumes no liability or responsibility for any errors or omissions in the content of this site.

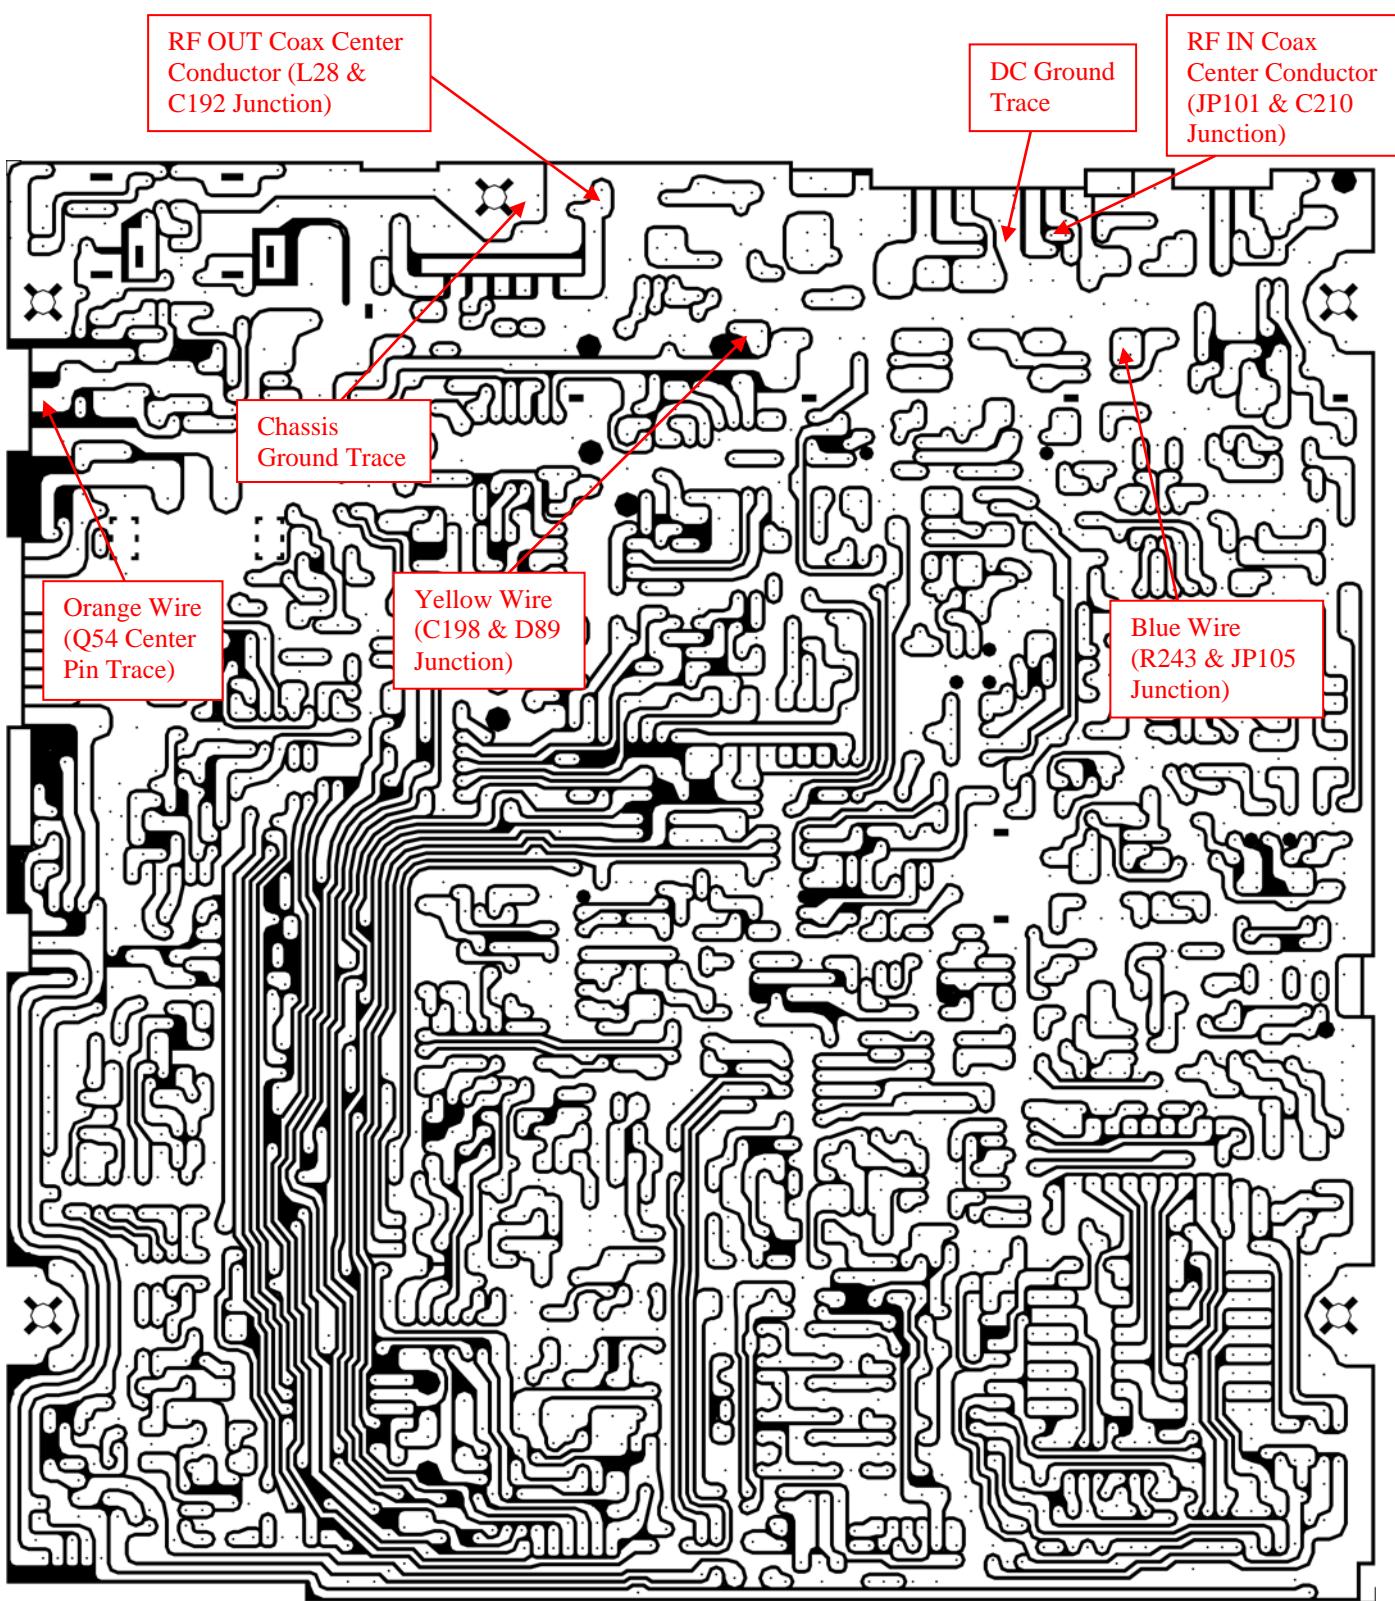

The user is solely responsible for making sure that any modifications made to the radio unit must meet all Federal and State Regulations or the Country of use! Liability of damages to any equipment is the sole responsibility of the user! Downloading, viewing, or using any information provided on these pages automatically accepts the user to the terms of this agreement! Modifications are provided for information purposes only! Disclaimer: CBTricks.com does not warrant the accuracy of the information contained herein nor is it responsible for any errors or omissions and assumes no liability for the content on this site. While CBTricks.com uses reasonable efforts to include accurate and up to date information, CBTricks.com makes no warranties or representations as to its accuracy or timeliness and assumes no liability or responsibility for any errors or omissions in the content of this site.